

F18XOS01XX Series Solo

Shower rod - ø 20 mm. - With cylindrical supports for wall anchorage adjustable on length. Article equipped with antitwist hose - 1500 mm. -, 5-function hand shower and slide with easy-action lever

Product Data

Overall Dimensions (Inch.) 2-13/16x3-9/16x35-9/16

Net Weight (lbs.) 3.97


Installation Hardware Details

Stainless steel screw and dowels

Packaging Details

| Package | Cardboard package |
|------------------------------|------------------------|
| Package dimensions (Inch.) | 36 x 6-11/16 x 2-13/16 |
| Weight with Packaging (lbs.) | 4.45 |



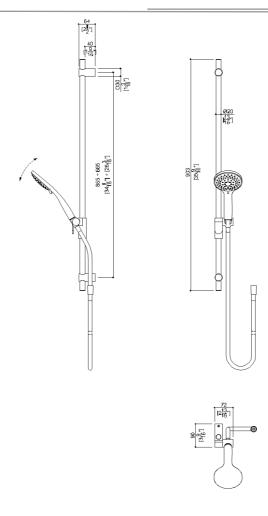



F18XOS01xx Series Solo

Materials and finishes

Stainless Steel

Polished

Installation

Ponte Giulio suggests the product must be installed by a professional operator, wich is capable to verify the characteristics of the support to which the item must be installed.

Load Capacity

Vertical 250 lbs. Horizontal 250 lbs.

Warning

- Prior to installing and using the device, carefully read the instructions for use and – in particular – the safety precautions, and comply with them. Store this manual for reference for the entire life-cycle of the device
- Should this manual get damaged, or if certain sections are difficult to understand, prior to using the device contact the company at the address indicated on the last page.
- Any changes to the information provided in the instruction manual if deemed important for the user's safety shall be announced through the Ponte Giulio Internet website and notified to all authorised dealers.

Cleaning

- The device is not affected by the room's temperature, though it must not be installed in locations subject to temperatures below $39^{\circ}F$ ($4^{\circ}C$) or above $104^{\circ}F$ ($40^{\circ}C$).
- Do not install in saunas.

Warranty

Shower Curtain Rails: Lifetime

For full warranty information, please visit Please visit www.pontegiulio.com